


3:1 AIR-OPERATED OIL PUMP

- The 3:1 is perfect for fluid oil transfer in high volume and longer distance applications such as truck shop service fleet facilities and in-plant applications
- Corrosion-resistant design utilizes liquid salt nitriding, nickel plating, stainless steel, aluminum and chrome on key components for longer life
- Few moving parts in the air motor assembly means less downtime and low repair cost
- Large air porting design provides efficient use of compressed air supply for continuous pump operation without icing

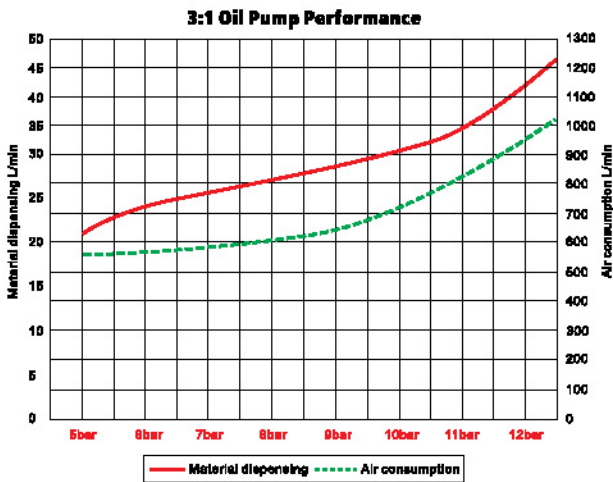

17130301 / 17130303 17130331 / 17130333 17130361 / 17130363 17130371 / 17130373

Item No.	17130301/17130303	17130331/17130333	17130361/17130363	17130371/17130373
Drum application	Pail	50-60L / 13-16gallon	180-220L / 48-58gallon	1040L / 275gallon
Pressure ratio	3:1	3:1	3:1	3:1
Air inlet pressure	5-12bar / 70-180psi	5-12bar / 70-180psi	5-12bar / 70-180psi	5-12bar / 70-180psi
Max. fluid pressure	36bar / 500psi	36bar / 500psi	36 bar / 500psi	36bar / 500psi
Air motor effective diameter	76.2mm / 3"	76.2mm / 3"	76.2mm / 3"	76.2mm / 3"
Air consumption (min)	@ 8bar 600L @ 115psi / 21.6CFM	@ 8bar 600L @ 115psi / 21.6CFM	@ 8bar 600L @ 115psi / 21.6CFM	@ 8bar 600L @ 115psi / 21.6CFM
Max. free flow rate (min)	45L / 12gallon	45L / 12gallon	45L / 12gallon	45L / 12gallon
Suction tube diameter	54mm / 2.1"	54mm / 2.1"	54mm / 2.1"	54mm / 2.1"
Suction tube length	270mm / 11"	730mm/29"	940mm / 37"	1190mm / 46"
Air inlet connection	1/4" quick plug 1/4" NPT Female	1/4" quick plug 1/4" NPT Female	1/4" quick plug 1/4" NPT Female	1/4" quick plug 1/4" NPT Female
Oil outlet connection	3/4" F	3/4" F	3/4" F	3/4" F
Accessory	3/4" M - 1/2" F reducer	3/4" M - 1/2" F reducer	3/4" M - 1/2" F reducer	3/4" M - 1/2" F reducer
Weight	7.8kgs / 17lbs	9.7kgs / 21lbs	10.5kgs / 23lbs	11.5kgs / 25.3lbs
Package volume	0.0325cbm / 1.148cft	0.052cbm / 1.836cft	0.065cbm / 2.295cft	0.091 cbm / 3.213cft
Test media: SAE30 oil, +20°C, 2M hose length free outlet.				