
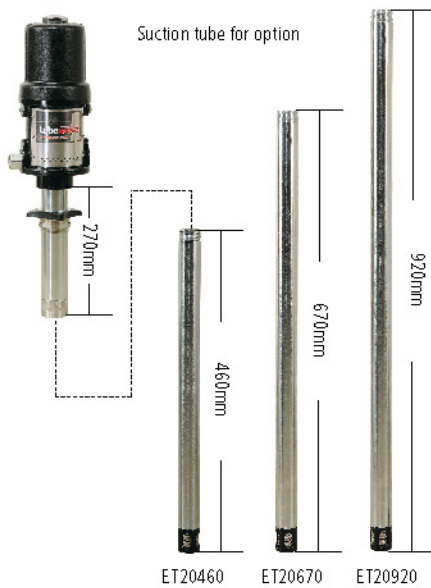


5:1 AIR-OPERATED OIL PUMP

- The 5:1 is perfect for fluid oil transfer in high volume and longer distance applications such as truck shop service fleet facilities and in-plant applications

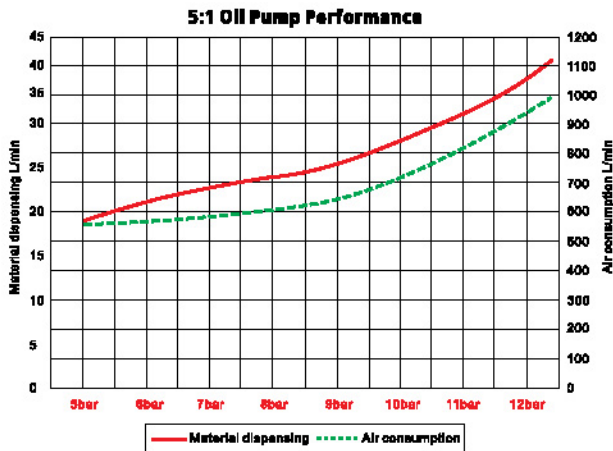

Item No.	17130501/17130503	17130531/17130533	17130561/17130563	17130571/17130573
Drum application	Pail	50-60L / 13-16gallon	180-220L / 48-58gallon	1040L / 275gallon
Pressure ratio	5:1	5:1	5:1	5:1
Air inlet pressure	5-12bar / 70-180psi	5-12bar / 70-180psi	5-12bar / 70-180psi	5-12bar / 70-180psi
Max. fluid pressure	60bar / 870psi	60bar / 870psi	60bar / 870psi	60bar / 870psi
Air motor effective diameter	76.2mm / 3"	76.2mm / 3"	76.2mm / 3"	76.2mm / 3"
Air consumption (min)	@ 8bar 600L @ 115psi / 21.6CFM	@ 8bar 600L @ 115psi / 21.6CFM	@ 8bar 600L @ 115psi / 21.6CFM	@ 8bar 600L @ 115psi / 21.6CFM
Max. free flow rate (min)	40L / 11gallon	40L / 11gallon	40L / 11gallon	40L / 11gallon
Suction tube diameter	54mm / 2.1"	54mm / 2.1"	54mm / 2.1"	54mm / 2.1"
Suction tube length	270mm / 11"	730mm / 29"	940mm / 37"	1190mm / 46"
Air inlet connection	1/4" quick plug 1/4" NPT Female	1/4" quick plug 1/4" NPT Female	1/4" quick plug 1/4" NPT Female	1/4" quick plug 1/4" NPT Female
Oil outlet connection	3/4" F	3/4" F	3/4" F	3/4" F
Accessory	3/4" M - 1/2" F reducer	3/4" M - 1/2" F reducer	3/4" M - 1/2" F reducer	3/4" M - 1/2" F reducer
Weight	7.8kgs / 17lbs	9.7kgs / 21lbs	10.5kgs / 23lbs	11.5kgs / 25.3lbs
Package volume	0.0325cbm / 1.148cft	0.052cbm / 1.836cft	0.065cbm / 2.295cft	0.091cbm / 3.213cft
Test media: SAE30 oil, +20°C, 2M hose length free outlet.				